

HodgePodge

Calisthenics.02 Product Specifications


















Published: March 2020


Calisthenics.02

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Calisthenics.02 combines climbing and calisthenics in one. Whether pull-ups or hand-overhand moves, fitness fans will be spoiled for choice when using this piece of apparatus, which is more than 30' long. Calisthenics.02 is just one of many possible variants: the color, shape and functionality can be tailored to specific requirements so as to fit in with the surroundings, whether urban or natural.

95.190.481

	Product Family	HodgePodge
	Length x Width x Height (m) Length x Width x Height ("")	3,2 x 9,9 x 2,4 10-5 x 32-6 x 7-10
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	7,2 x 12,9 6,9 x 13,6 22-5 x 44-6
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	2,39 7-10
	Age	5+
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	68.8 677
	Number of Foundations	4
	Concrete Volume C20/C25 (ft³)	148.4
	Number of skilled Installers required	3
	Installation Time without Foundation	12 hours
	Dimensions of largest Part ("")	On request
	Weight of heaviest Part (lbs)	On request
	Shipping Volume (ft³)	On request
	Total Weight (lbs)	On request
	Spare Part Guarantee	Lifelong

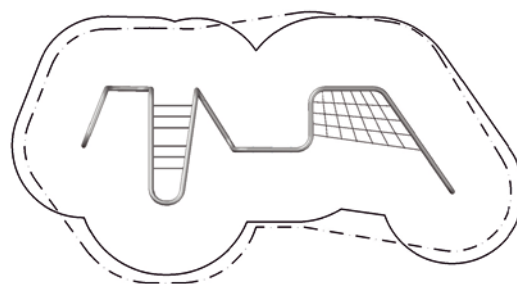

Technical Data

The following text can also be used for tenders.

Tubes:

The bent steel tubes with a diameter of Ø 6 3/8" are thermally galvanized to protect against corrosion and powder-coated in color using a solvent-free epoxy-polyester-process.

Bars:

Stainless steel tubes with a diameter of Ø 1 1/8" and a wall thickness of 3/16".

Handles:

The handles are made of galvanized steel and have a rubber covering.

Charlotte-Connector:

Internal fastening system for single rope endings at the arch tubes. The fixing works without hooks or visible ferrules, pre-prepared net segments can easily get installed and still stay exchangeable.

Rope:

The U-Rope® with strand cores and rope core made of galvanized wires has outer strands which are covered with highly abrasion-resistant and highly UV-resistant polyester yarn (not polypropylene). The rope diameter is Ø 1 1/8".

Planar Net:

The planar net with a mesh size of at least 9 1/4" x 9 1/4" is permanently localized at the rope crossing points by durable drop-forged aluminum balls (no plastic).