

# Twist & Shout

Shout.08 Product Specification



Published: June 2020



## Shout.08

With its helical shape, the product "Twist" adapts to any landscape. Arches of different sizes can be combined at various angles. No matter whether the climbing structure is 5 or 500 metres long, the net made of original Berliner U-Rope provides continuous climbing fun for young and old alike on a varied and challenging climbing course. Shout's steel frames run parallel.

Whether upwards or downwards, outside or in, Shout.08's net funnel can be scaled by many children at once, as well as offering much scope for role-playing. A climbing net and a vertical flat net offer a range of climbing alternatives.

## 95.190.472

 Product Family	<b>Twist &amp; Shout</b>
 Length x Width x Height (m) Length x Width x Height ("'-")	<b>3,6 x 6,9 x 2,5</b> <b>11-10 x 22-7 x 8-1</b>
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	<b>6,6 x 10,0</b> <b>7,3 x 10,6</b> <b>23-10 x 34-7</b>
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	<b>2,38</b> <b>7-10</b>
 Age	<b>5</b>
 Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>52,82</b> <b>On request</b>
 Number of Foundations	<b>4</b>
 Concrete Volume C20/C25 (m <sup>3</sup> )	<b>9,3</b>
 Number of skilled Installers required	<b>On request</b>
 Installation Time without Foundation	<b>On request</b>
 Dimensions of largest Part (m)	<b>On request</b>
 Weight of heaviest Part (kg)	<b>On request</b>
 Shipping Volume (m <sup>3</sup> )	<b>On request</b>
 Total Weight (kg)	<b>On request</b>
 Spare Part Guarantee	<b>Lifelong</b>

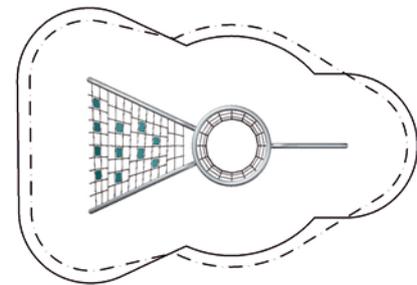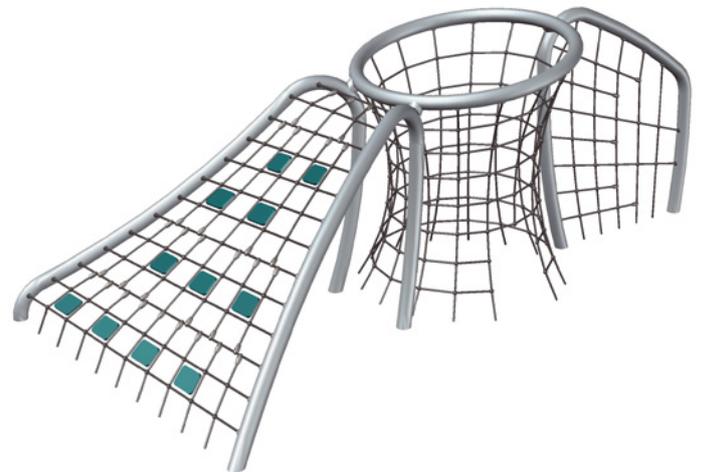

### Technical Data

The following text can also be used for tenders.

#### Included Products:

- Net Funnel
- HDPE Plates

#### Arch Structure:

The steel pipes with a diameter of Ø 168 mm (6 5/8") and a wall thickness of 10 mm (3/8") are sandblasted and powder-coated in a solvent-free epoxy-polyester-process.

#### Ropes:

The U-Rope® with strand cores and rope core made of galvanised wires has outer strands which are covered with highly abrasion-resistant and highly UV-resistant polyester yarn (not polypropylene). The rope diameter is Ø 18 mm (11/16").

#### Planar Nets:

The planar nets with a rope diameter of Ø 18 mm (11/16") and a mesh size of at least 250 x 250 mm (9 13/16" x 9 13/16") are permanently localised at the rope crossing points by durable drop-forged aluminium balls (no plastic).

#### Charlotte-Connector:

Internal fastening system for single rope endings at the arch tubes. The fixing works without hooks or visible ferrules, pre-prepared net segments can easily get installed and still stay exchangeable.

#### HDPE Plates:

The dyed HDPE panels with a thickness of 19 mm (3/4") have a grained surface and all edges are rounded. The attachment is made by aluminium clamps.